




BIJLSMA BITUMEN TANKER 6300



The Bijlsma Bitumen tanker is equipped to transport asphalt, petroleum products, and chemicals. The cargo tanks can be safely heated to 250 °C, to keep a wide range of cargos in a sufficiently liquid form for transportation.

The tanker is designed for environmentally-friendly transports with a very high safety profile, including double engine rooms, propellers, rudders and an integrated bridge system adapted to future tanker transports.

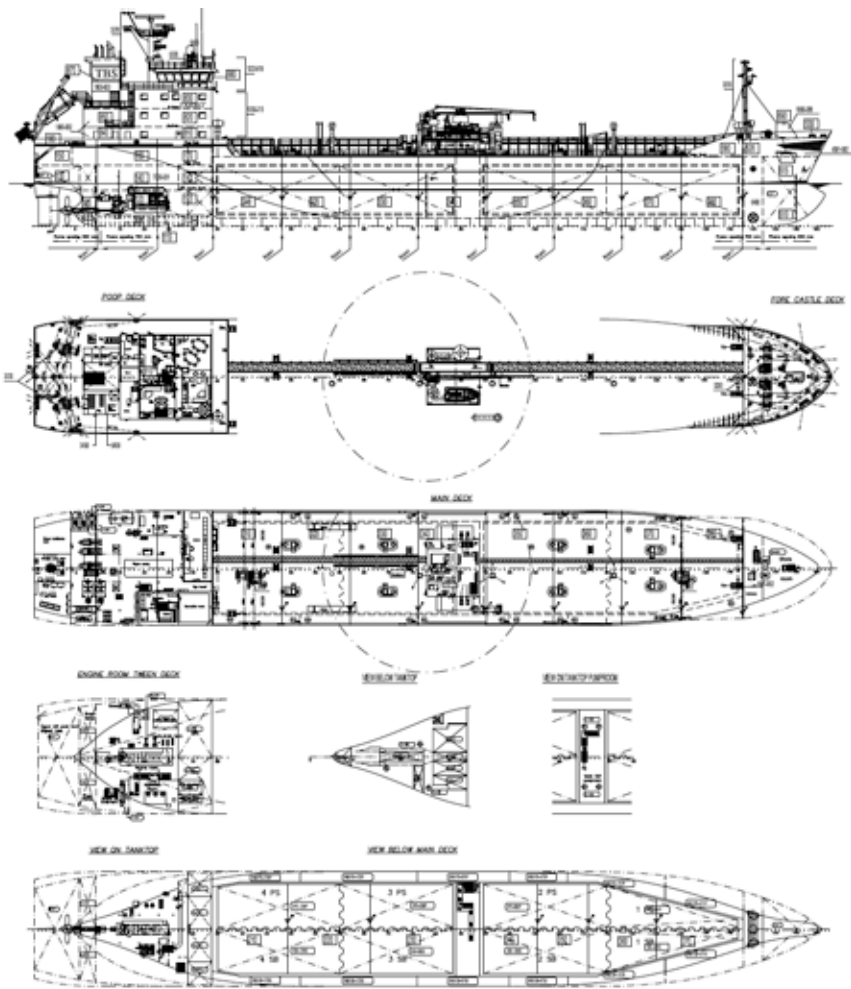

TECHNICAL SPECIFICATIONS

Principal dimensions

Length overall	: 114.60 m
Length waterline	: 108.90 m
Beam	: 16.45 m
Depth	: 9.85 m
Draft	: 6,70 m
Deadweight	: 6,314 tons

Cargo tanks

Tanks	: 4x2 wing tanks
Max temperature	: 250°C
Capacity (98%)	: 5,543 m ³

Power and Propulsion

Main engine	: 1x 4,350 kW
Bow thruster	: 400 kW
Service speed	: 15 knots

Classification	: B.V.
Chemical class	: IMO 2

All specifications and general arrangements as provided in this document are provisional.

A-16



VEKA Group bv
 T +31 (0)183 - 505 230
 info@vekagroup.com
 www.vekagroup.com